


Datasheet

# LION Smart Storage Power 42



Industry and Commercial  
Energy Storage

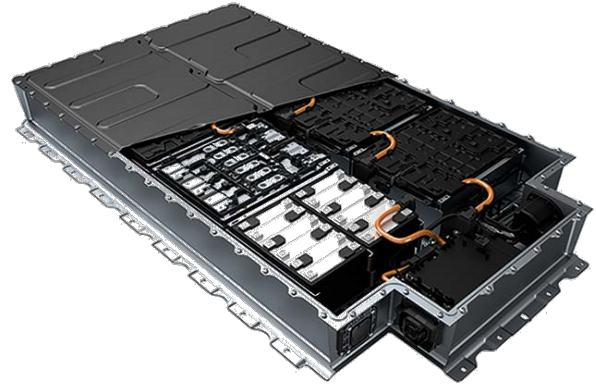

Uninterruptible  
Power Supply

## Features

### Availability

- Off-the-shelf available

### High peak power

- High peak power capability
- Fast charging compatibility

### Customizable setup

- Connectivity up to 26 batteries via gateway up to 1,097 kWh
- Ideal for 400V & 800V architecture

### Field proven technology

- Based on automotive BMW i3 battery
- Over 1 Bn. km driven p.a.

### High quality components

- Samsung SDI battery cells (NMC)
- High quality electronic components

### Easy integration

- Contact protection on pack level
- Standardized interfaces & customized software

### Designed for critical mobility applications

- Safety certified Battery Management Systems (BMS)
- Robust passive safety structure



The Future Of Battery Technology

LION Smart

## Standards Compliance

- ECE R100 Battery safety
- ECE R10 EMC
- UN 38.3 Transport Safety
- ISO 16750 Environmental conditions
- IEC 62619 CMV
- Functional safety
  - IEC 61508 SIL 2
  - ISO 26262 ASIL C
- Fully compliant for a wide range of mobile and stationary energy storage applications and use cases

## Applicable Conditions

- Ordering Code: 1001489-01
- Optimized shipping quantity:
  - Europe: 42 batteries in wooden box or 54 in returnable rig
  - Overseas: 48 batteries in wooden box

## Contact Info

[sales@lionsmart.com](mailto:sales@lionsmart.com)



Parameter	Unit	Value
Configuration (Modules x Cells)		96s1p (8 x 12)
Battery Cell Chemistry		NMC
Charging end point (operation)	V	403.2
Nominal Voltage (DC)	V	352.3
Discharge end point (operation)	V	259.2
Nominal Capacity	Ah	120
Energy Content (nominal)	kWh	42.2
End of Life (State of Health)*	%	70
Cycle Life (@25°C ambient, 1C/1C & 100% DoD)	#	>2,500
Cycle Life (@25°C ambient, 1C/1C & 80% DoD)	#	>3,000
Max. Discharge Power (90 % SoC, 25 °C)	kW	60
Cont. Discharge Power (90 % SoC, 25 °C, for one cycle, cooling required)	kW	40
Max. Charge Power (50% SoC, 25 °C)	kW	60
Cont. Charge Power (@ 25 °C ambient, until CV charging step, for one cycle, cooling required)	kW	40
Protection class (IP class)		IP67, IP6K9K
Dimensions (L x W x H) Housing	mm	1,662 x 964 x 174
Total Weight (depending on variant)	kg	approx. 276
Humidity Range (during storage)	%	0-90 (no condensation)
Heating		1kW electrical heating included
Cooling		Refrigerant R1234yf; R134a

\*Further use beyond this point is not recommended for safety reasons.



The Future Of Battery Technology

LION Smart