

Datasheet


LION Smart Storage Power 53



Industry and Commercial
Energy Storage



Uninterruptible
Power Supply

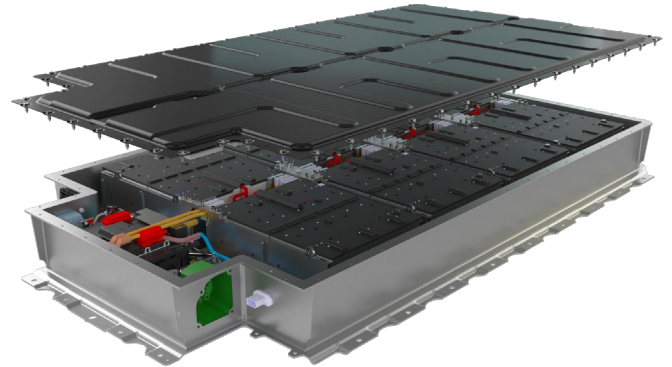

Features

Availability

- Samples available Q1/2025

Backward compatible

- Same interfaces and form factor as LION Smart Storage Power 42

High peak power

- High peak power capability
- Fast charging compatibility

Customizable setup

- Connectivity up to 12 batteries via gateway up to 634 kWh
- Ideal for 400V and 800V architecture

High quality components

- NMC battery cells
- High quality electronic components and algorithms

Easy integration

- Contact protection on pack level
- Standardized interfaces & customized software

Designed for critical mobility applications

- Safety certified Battery Management Systems (BMS)
- Robust passive safety structure



The Future Of Battery Technology

LION Smart

Preliminary, subject to change
without notice

Standards Compliance

- ECE R100 Battery safety
- ECE R10 EMC
- UN 38.3 Transport Safety
- ISO 16750 Environmental conditions
- Functional safety
 - IEC 61508 SIL 2
 - ISO 26262 ASIL C
- Fully compliant for a wide range of mobile and stationary energy storage applications and use cases

Applicable Conditions

- Optimized shipping quantity:
 - Europe: 42 batteries in wooden box
 - Overseas: 48 batteries in wooden box

Contact Info

sales@lionsmart.com



Parameter	Unit	Value
Configuration (Modules x Cells)		96s1p (8 x 12)
Battery Cell Chemistry		NMC
Charging end point (operation)	V	417.6
Nominal Voltage (DC)	V	359.0
Discharge end point (operation)	V	268.8
Nominal Capacity	Ah	147
Energy Content (nominal)	kWh	52.8
Energy Content (usable)	kWh	47.4
End of Life (State of Health)*	%	70
Cycle Life (@25°C ambient, 1C/1C & 100% DoD)	#	>2,500
Cycle Life (@25°C ambient, 1C/1C & 80% DoD)	#	>3,000
Protection class (IP class)		IP67, IP6K9K
Dimensions (L x W x H) Housing	mm	1662 x 964 x 174
Total Weight (depending on variant)	kg	approx. 280
Humidity Range (during storage)	%	0-90 (no condensation)
Heating	kW	1 (optional equipment)
Cooling		Direct Refrigerant, by coolant R1234yf; R134a; water-glycol

*Further use beyond this point is not recommended for safety reasons.



in FOLLOW US ON LINKEDIN

The Future Of Battery Technology

LION Smart